



Release Note

Software Version: 2.1.2.3697

Models: iW30/i18S/i20S/i23S/i30/i31S/PA2

Software Version: 2.4.2041.578

Models: i12

Date: 2018-12-07



1 New Features

1. Added the Metaswitch server type, which is compatible with the Metaswitch server.

2 Optimization

1. Optimized the length of the Server Address URL under Static Provisioning Server module to 256.

3 BUG Fixes

1. Fixed the issue that registered to the Metaswitch server using the TLS protocol and enabling the SRTP, there will be a single way call after long-term call.

4 New Features Description

1. Added the Metaswitch server type, which is compatible with the Metaswitch server.

Description: On the Web Page Line >> Advanced Settings page, select the server type as Metaswitch, which compatible with the Metaswitch server Intercom and other functions.

Web page configuration:

The screenshot displays the 'Basic Settings' tab of the 'SIP' configuration page. The 'Specific Server Type' dropdown menu is highlighted with a red box and set to 'Metaswitch'. Other visible settings include:


Setting	Value
Enable DND	<input type="checkbox"/>
Blocking Anonymous Call	<input type="checkbox"/>
Use 182 Response for Call waiting	<input type="checkbox"/>
Anonymous Call Standard	None
Dial Without Registered	<input type="checkbox"/>
Click To Talk	<input type="checkbox"/>
User Agent	
Response Single Codec	<input type="checkbox"/>
Enable Blocking Anonymous Call	
Disable Blocking Anonymous Call	
Specific Server Type	Metaswitch
Registration Expiration	3600 Second(s)
Use VPN	<input checked="" type="checkbox"/>
Use STUN	<input type="checkbox"/>
Convert URI	<input checked="" type="checkbox"/>
Ring Type	Default
Conference Type	Local
Server Conference Number	
Transfer Timeout	0 Second(s)
Enable Long Contact	<input type="checkbox"/>
Enable Use Inactive Hold	<input type="checkbox"/>
Use Quote in Display Name	<input type="checkbox"/>
Enable DNS SRV	<input type="checkbox"/>
Keep Alive Type	SIP Option
Keep Alive Interval	60 Second(s)
Sync Clock Time	<input type="checkbox"/>
Enable Session Timer	<input type="checkbox"/>

5 Optimization Description

1. Optimized the length of the Server Address URL under Static Provisioning Server module to 256.

Description: On the web System >> Auto Provision page, extended server address URL to 256 bits, which was previously 92 bits.

Web page configuration:

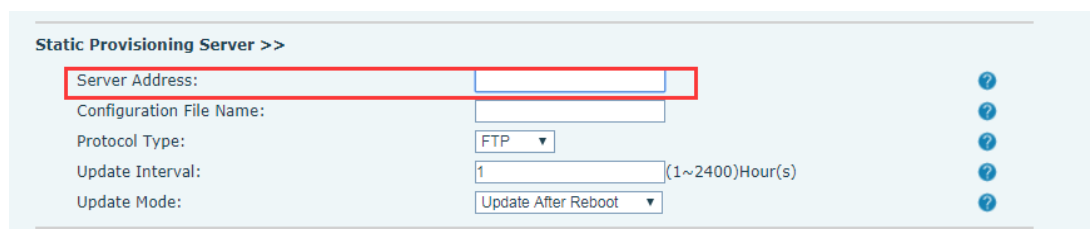

The screenshot shows the configuration page for the Static Provisioning Server. The title is "Static Provisioning Server >>". There are five configuration items, each with a help icon (question mark) to its right:

- Server Address: [Text input field, highlighted with a red box]
- Configuration File Name: [Text input field]
- Protocol Type: [Dropdown menu showing "FTP"]
- Update Interval: [Text input field with "1" and "(1~2400)Hour(s)"]
- Update Mode: [Dropdown menu showing "Update After Reboot"]